

# SOLSTICE<sup>®</sup> 454A (R-454A)

Technical Data Sheet - North America

Solstice<sup>®</sup> 454A (R-454A) is a non-ozone depleting, zeotropic blend designed as a low GWP alternative to R-404A in refrigeration applications.

Solstice<sup>®</sup> 454A demonstrates approximately 6% improved efficiency, 8% better capacity and has 94% lower GWP than R-404A.

With its environmental qualities and an evaporator glide of ~8°F, R-454A can be an effective long term refrigeration solution in many applications:

- Low and medium temperature supermarket refrigeration systems
- Retail food condensing units
- Cold storage
- Industrial Process Refrigeration (non-chiller)
- Industrial process refrigeration (chillers)

\*Maximum 200lb in applications per EPA Technology Transitions Rule

GENERAL PROPERTIES	
Class/Type	Zeotropic Blend
Formula	R-32 / R-1234yf (65% / 35%)
Appearance	Colorless
ODP	0
GWP (IPCC AR4)	239
Flammability Limits (% vol)	LFL = 8.4%, 17.5lb/1000 ft <sup>3</sup>
ASHRAE Standard 34 Class	A2L
UNITS	
Molecular weight	80.5 kg/kmol
Boiling Temperature	-54.1°F
Critical Temperature	179.1°F
Critical Pressure	671.1psia
Critical Volume	0.035 ft <sup>3</sup> /lbm
Critical Density	28.49 lbm/ft <sup>3</sup>
Vapor Density at 0 psig (Boiling Point)	0.212 lbm/ft <sup>3</sup>
Liquid Density at 32°F	69.75 lbm/ft <sup>3</sup>
Liquid Density at 77°F	63.73 lbm/ft <sup>3</sup>
Vapor Density at 77°F	3.003 lbm/ft <sup>3</sup>
Liquid Heat Capacity at 77°F	0.388 Btu/lbm-R
Vapor Heat Capacity at 77°F	0.29 Btu/lbm-R
Vapor Pressure at 77°F	168.86 psia
Liquid Thermal Conductivity at 77°F	0.048 Btu/h-ft-R
Vapour Thermal Conductivity at 77°F	0.008 Btu/h-ft-R
Liquid Viscosity at 77°F	0.000082 lbm/ft-sec
Vapour Viscosity at 77°F	0.000008 lbm/ft-sec



## BENEFITS

- Maximum 200lbs in some applications per EPA regulation
- 94% lower GWP than R-404A
- Very close match to R-404A equipment design
- Approximately 6% higher EER than R-404A
- Temperature glide similar to R-448A
- Miscibility with POE lubricants

**Honeywell**

## SAFETY AND STORAGE

Honeywell recommends reading the Safety Data Sheet (SDS) before using the product. Solstice® 454A is a mildly-flammable refrigerant (ASHRAE class A2L).

## MATERIAL COMPATIBILITY

Honeywell does not recommend the use of chlorinated solvents to clean refrigeration systems or components.

## Desiccants

Desiccant driers compatible with Solstice® 454A are commercially available. Contact individual drier manufacturers for specific recommendations.

## Lubricants

POE (polyol ester) oil is recommended for Solstice® 454A. Compressor manufacturers typically qualify specific lubricants for use with their products. Check with the equipment manufacturer for the recommended lubricants for their system.

## Plastics and elastomers


Solstice® 454A is compatible with most common materials. Since there are many different grades and formulations of these materials, we recommend that compatibility testing be performed on the specific grade of materials under consideration and at the conditions of use when designing new systems. Customers should consult the manufacturer or conduct further independent testing.

## LEAK DETECTION

Leak detectors can be used for pinpointing specific leaks or for monitoring an entire room on a continual basis. Leak detection is important for refrigerant conservation, equipment protection and performance, reduction of emissions and protection of those coming in contact with the system. Customers should consult the equipment manufacturer for appropriate detectors.

## PRESSURE AND ENTHALPY

### Solstice® 454A (R-454A)

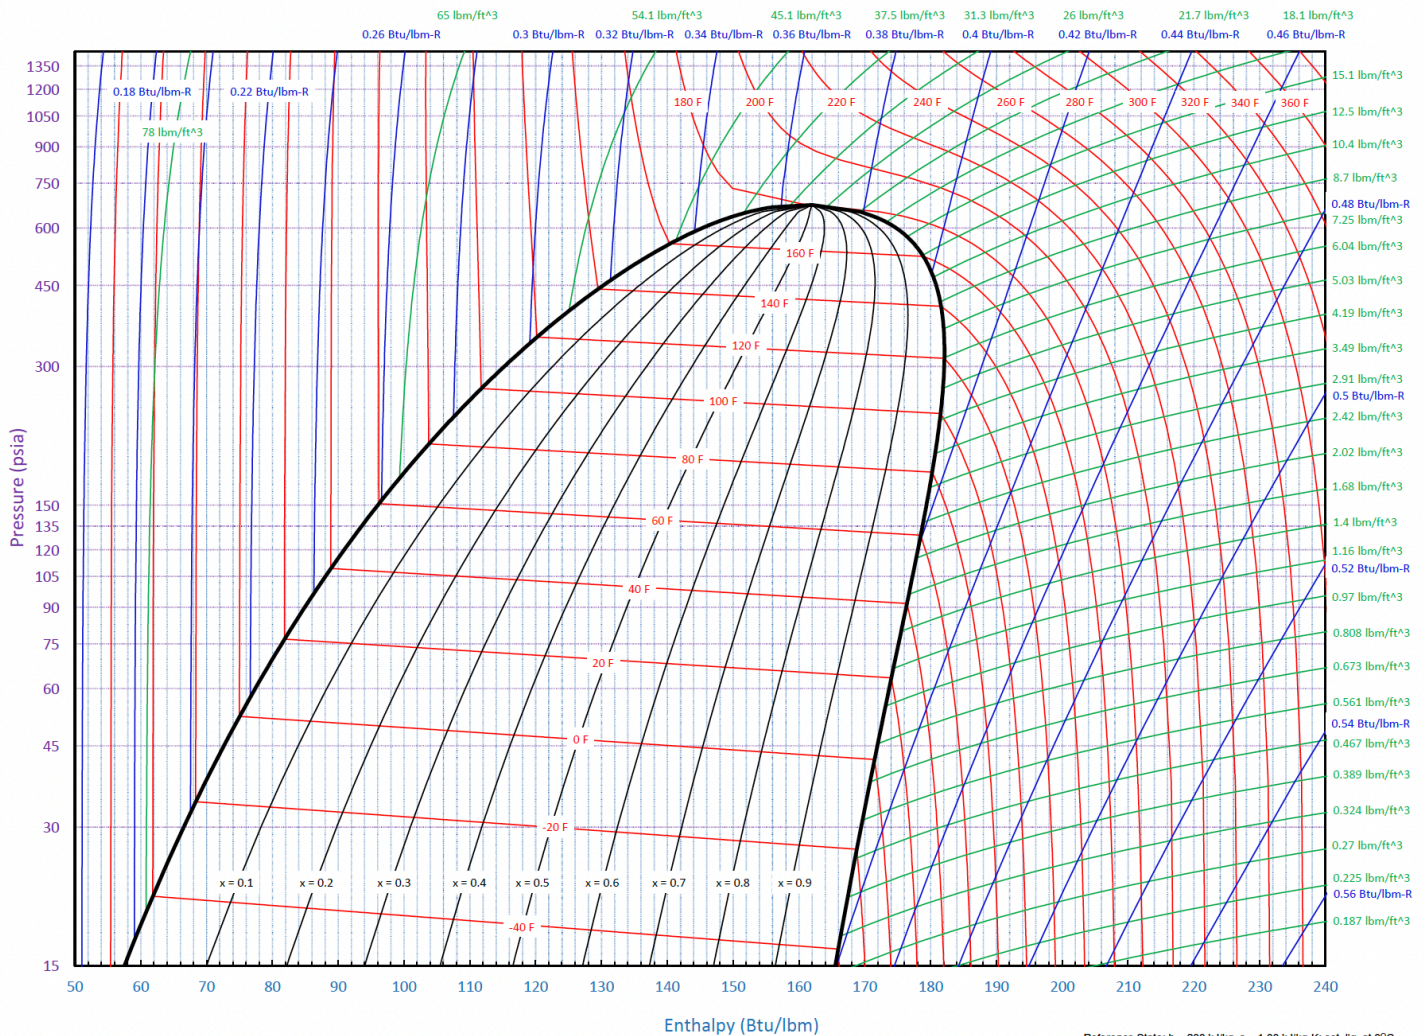

SOLSTICE 454A P-T CHART		
PRESSURE (PSIG)	VAPOR TEMPERATURE °F	BUBBLE TEMPERATURE °F
0	-54.1	-43.9
5	-42.9	-32.6
10	-33.8	-23.5
15	-26.0	-15.7
20	-19.1	-8.8
22	-16.6	-6.3
24	-14.2	-3.8
26	-11.8	-1.5
28	-9.6	0.7
30	-7.4	2.9
32	-5.3	5.0
34	-3.3	7.0
36	-1.4	9.0
38	0.6	10.9
40	2.4	12.7
42	4.2	14.5
44	6.0	16.2
46	7.7	17.9
48	9.3	19.6
50	10.9	21.2
55	14.8	25.1
60	18.5	28.8
70	25.4	35.6
80	31.7	41.8
90	37.5	47.6
100	42.9	53.0
105	45.5	55.5
110	48.0	58.0
115	50.4	60.4
120	52.7	62.7
125	55.0	64.9
130	57.3	67.1
135	59.4	69.3
140	61.5	71.4

SOLSTICE 454A P-T CHART		
PRESSURE (PSIG)	VAPOR TEMPERATURE °F	BUBBLE TEMPERATURE °F
145	63.6	73.4
150	65.6	75.4
155	67.6	77.3
160	69.5	79.2
165	71.4	81.1
170	73.3	82.9
175	75.1	84.7
180	76.9	86.4
185	78.6	88.1
190	80.4	89.8
195	82.1	91.5
200	83.7	93.1
205	85.3	94.7
210	86.9	96.2
215	88.5	97.8
220	90.1	99.3
230	93.1	102.2
240	96.1	105.1
250	98.9	107.9
260	101.7	110.5
270	104.4	113.2
280	107.1	115.7
290	109.6	118.2
300	112.1	120.6
310	114.6	122.9
320	117.0	125.2
330	119.4	127.5
340	121.7	129.7
350	123.9	131.8
360	126.1	133.9
370	128.3	136.0
380	130.4	138.0
390	132.5	139.9
400	134.6	141.8



Although Honeywell International Inc. believes that the information contained herein is accurate and reliable, it is presented without guarantee or responsibility of any kind and does not constitute any representation or warranty of Honeywell International Inc., either expressed or implied. A number of factors may affect the performance of any products used in conjunction with user's materials, such as other raw materials, application, formulation, environmental factors and manufacturing conditions among others, all of which must be taken into account by the user in producing or using the products. The user should not assume that all necessary data for the proper evaluation of these products are contained herein. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liabilities (including, but not limited to, risks relating to results, patent infringement, regulatory compliance and health, safety and environment) related to the use of the products and/or information contained herein.

For more Information visit:  
[advancedmaterials.honeywell.com](https://advancedmaterials.honeywell.com)



**Honeywell Advanced Materials**

115 Tabor Road  
Morris Plains, NJ 07950  
800-631-8138

TCS-24-01-EN | 02/24  
© 2024 Honeywell International Inc.

